




Heat generation in ice-prone areas where aerodynamics are a limitation

## Video



## Applications

- Aircraft wings
- Wind turbine blades
- Ice prevention and elimination in general

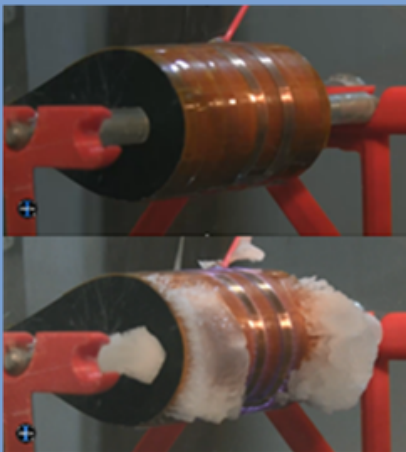

## Contact

Technology Transfer Office

✉ otri@inta.es

☎ 91 520 11 53

🌐 www.inta.es



Spanish Version



# ICE REMOVAL BY PLASMA ACTUATORS

The Experimental Aerodynamics Area of the Spanish National Institute of Aerospace Technology (INTA) investigates the generation and control of plasma to adapt the aerodynamics and the conditions of the air that flows around the bodies.

## Description

Plasma, the fourth state of matter, can be conceived as an ionized gas that exhibits collective behavior and, therefore, can be used technically through the external application of electric and magnetic fields. This, in turn, interacts with the surrounding air, generating an air flow in the direction, intensity and with the amount of heat desired at any given time. This flow can be used to condition the film of air that surrounds a body at will, generating different technical effects.

So called, plasma actuators are used for this purpose. These are devices that transform electrical energy (high voltage) into a physical response, in this case, the creation of a flow with the required characteristics. There are different types of actuators: Corona, DBD,...

In the application against the presence of ice, the device used is of the DBD type, which consists of two electrodes of minimum thickness, connected to a high voltage power supply, and separated from each other by a dielectric material (see figure below), alternating between two modes of operation: prevention (anti-icing) and elimination of ice (de-icing). The result is a device with practically negligible volume and that barely modifies the surface of the body. For this application, the characteristics of the device must be selected in such a way that they provide the appropriate amount of heat, which has implications both in the configuration of the device and in the way it is powered.

## Competitive advantages

It enables ice removal in areas where its presence can cause technical problems, without altering the aerodynamics of the surfaces. The main features of this system are:

- Simplicity and flexibility in control, robustness and reliability
- Short response time (~ ms)
- Minimum weight and volume
- Energy consumption limited by ice phase change
- Low power consumption. In de-icing mode, consumption is limited by the phase change of the ice.

## Situation

Patented technology. Validated and demonstrated in ice tunnel.

Looking for collaboration for the development of a demonstrator in real conditions and subsequent transfer of the technology.

